



**GP**  
**ELECTRONICS**

**DTA143ZCA**




Digital Transistor

## DTA143ZCA Digital Transistor(PNP)

### Feature

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input .They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

### Schematic diagram

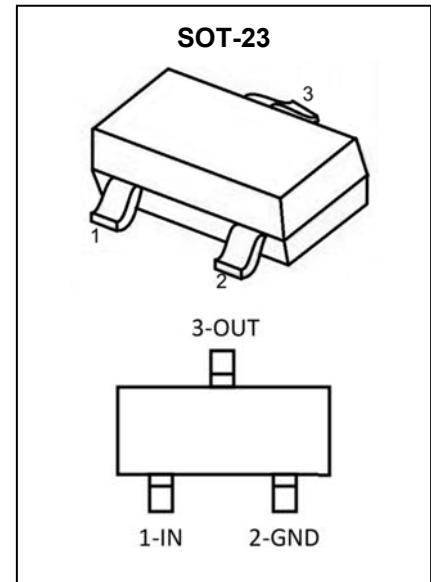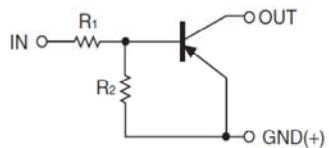

Marking: 13/HE13







**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)**


Parameter	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	-50	V
Input Voltage	V <sub>IN</sub>	-30~+5	V
Output Current	I <sub>O</sub>	-100	mA
Power Dissipation	P <sub>D</sub>	200	mW
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150	°C

**ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise noted)**

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Input voltage	V <sub>I(off)</sub>	V <sub>CC</sub> =-5V , I <sub>O</sub> =-100μA	-0.5			V
	V <sub>I(on)</sub>	V <sub>O</sub> =-0.3V , I <sub>O</sub> =-5mA			-1.3	V
Output voltage	V <sub>O(on)</sub>	I <sub>O</sub> =-5mA , I <sub>I</sub> =-0.25mA			-0.3	V
Input current	I <sub>I</sub>	V <sub>I</sub> =-5V			-1.8	mA
Output current	I <sub>O(off)</sub>	V <sub>CC</sub> =-50V , V <sub>I</sub> =0V			-0.5	μA
DC current gain	G <sub>I</sub>	V <sub>O</sub> =-5V , I <sub>O</sub> =-10mA	80			
Input resistance	R <sub>I</sub>		3.29	4.7	6.11	kΩ
Resistance ratio	R <sub>2</sub> / R <sub>1</sub>		8	10	12	
Transition frequency	f <sub>T</sub>	V <sub>O</sub> =-10V,I <sub>O</sub> =-5mA,f=100MHz		250		MHz

## Typical Characteristics

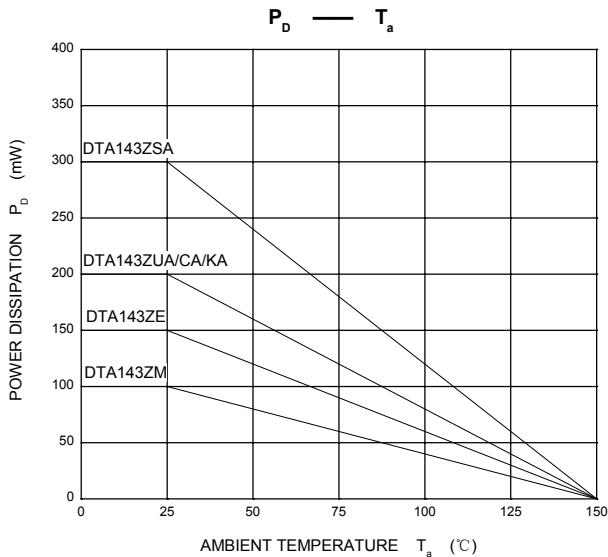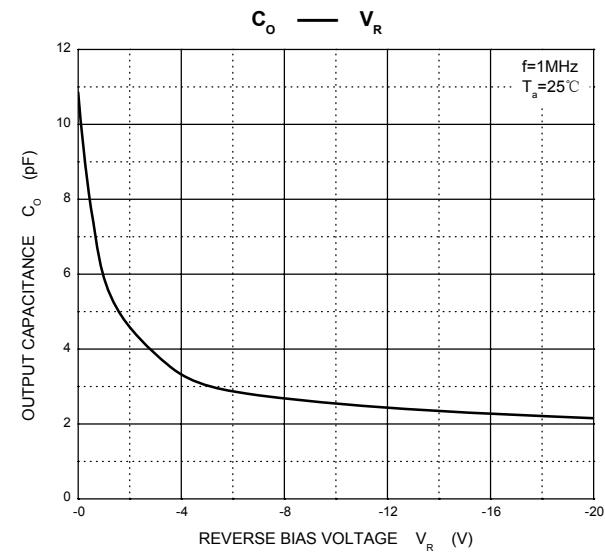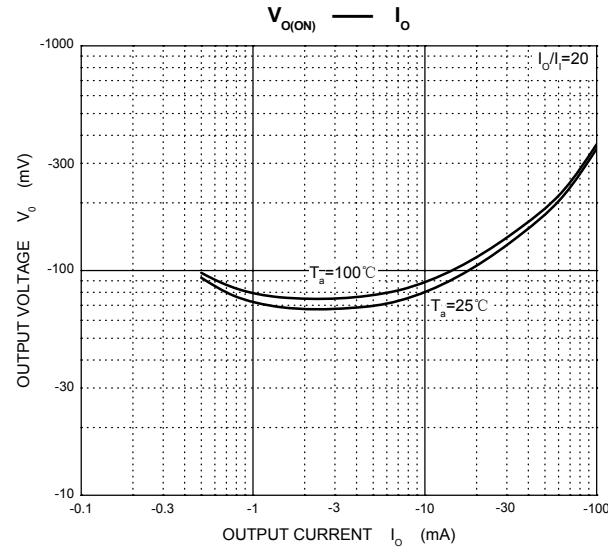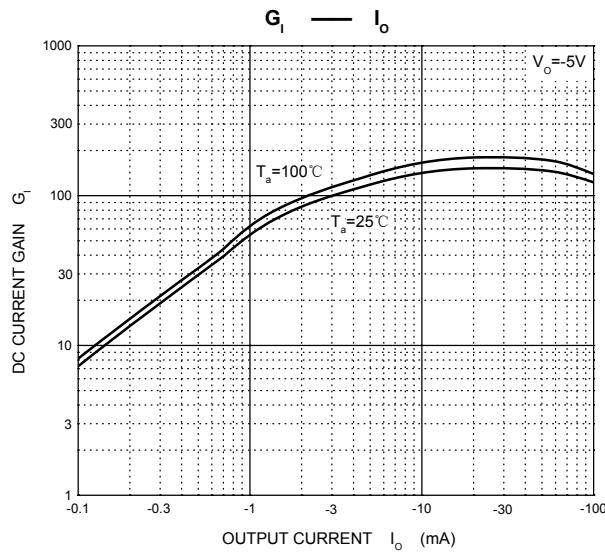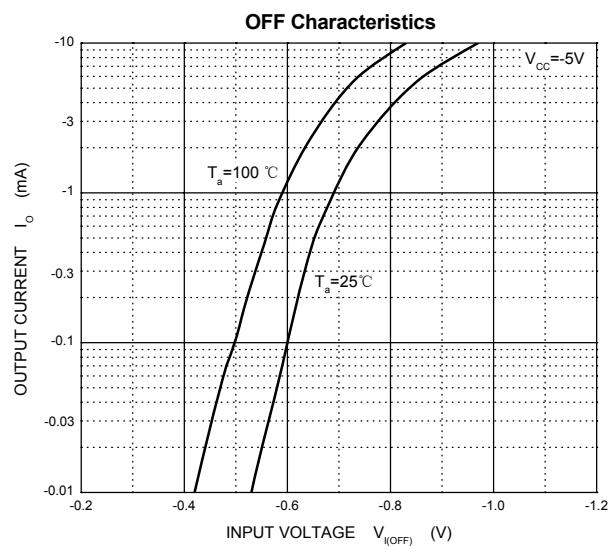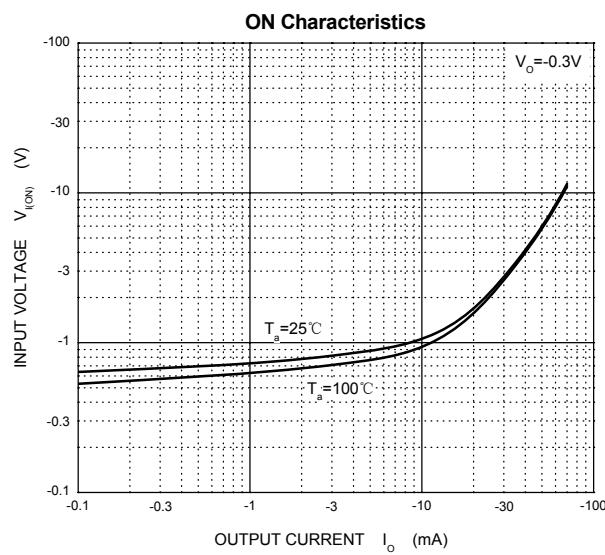

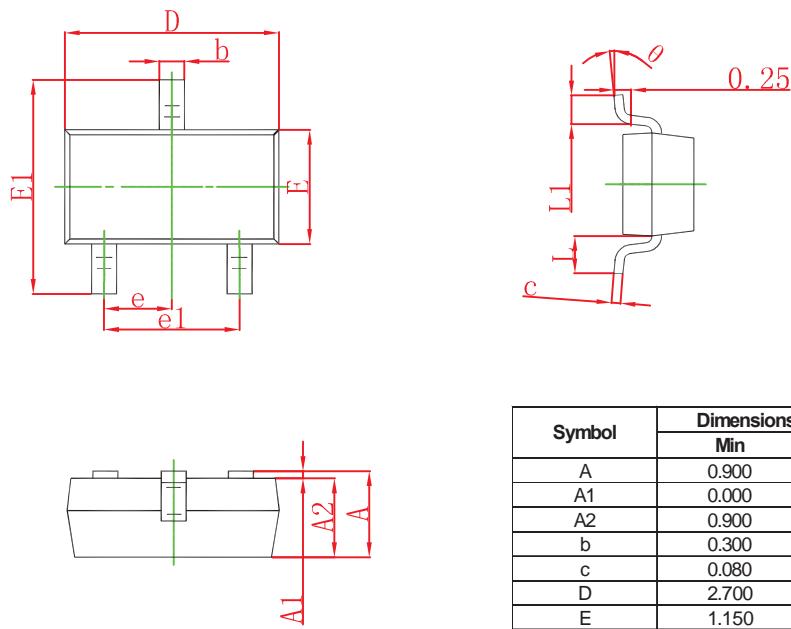**SOT-23 Package Information**


Symbol	Dimensions in Millimeters	
	Min	Max
A	0.900	1.300
A1	0.000	0.100
A2	0.900	1.200
b	0.300	0.550
c	0.080	0.200
D	2.700	3.100
E	1.150	1.500
E1	2.200	2.700
e	0.950 TYP	
e1	1.700	2.100
L	0.550 REF	
L1	0.200	0.500
θ	0°	8°