



Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-16V	15m Ω @-4.5V	-16A
	20m Ω @-2.5V	


Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge


Application

- Load Switch
- DC/DC Converter

MARKING:



.1216= Device Code
XX = Date Code

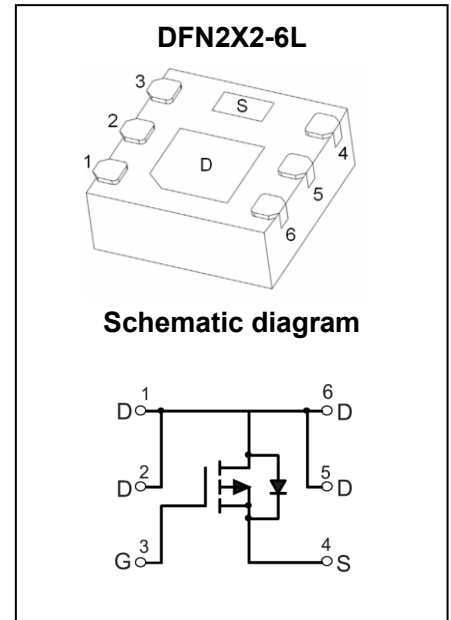

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	-16	V
Gate - Source Voltage	V_{GS}	± 10	V
Continuous Drain Current ^{1,5}	I_D	$T_A = 25^\circ\text{C}$	-16
		$T_A = 100^\circ\text{C}$	-10
Pulsed Drain Current ²	I_{DM}	-64	A
Power Dissipation ^{4,5}	P_D	2.5	W
Thermal Resistance from Junction to Case ⁵	$R_{\theta JA}$	50	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-16			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -16V, V_{GS} = 0V$			-1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 8V, V_{DS} = 0V$			± 100	nA
On Characteristics³						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	-0.4	-0.6	-1.0	V
Drain-source On-resistance	$R_{DS(on)}$	$V_{GS} = -4.5V, I_D = -6.7A$		15	20	m Ω
		$V_{GS} = -2.5V, I_D = -4.2A$		20	26	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = -7.5V, V_{GS} = 0V, f = 1MHz$		1066		pF
Output Capacitance	C_{oss}			156		
Reverse Transfer Capacitance	C_{rss}			129		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$		11		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = -10V, V_{GS} = -4.5V, I_D = -4A$		10.7		nC
Gate-source Charge	Q_{gs}			1.3		
Gate-drain Charge	Q_{gd}			2.7		
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = -6V, V_{GS} = -4.5V, I_D = -4A,$ $R_G = 1\Omega$		33		ns
Turn-on Rise Time	t_r			31		
Turn-off Delay Time	$t_{d(off)}$			58		
Turn-off Fall Time	t_f			26		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_S = -1.9A$			-1.2	V


Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$.
- 5.Device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.


Typical Characteristics

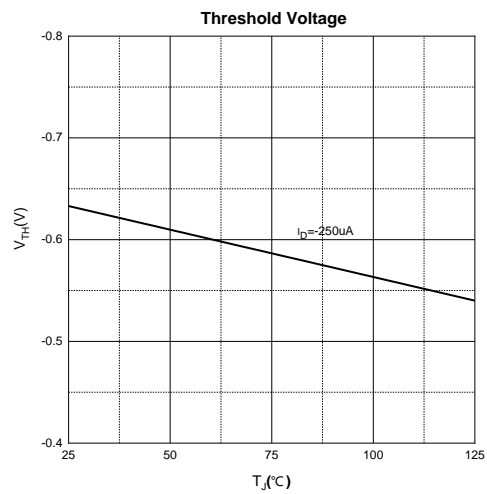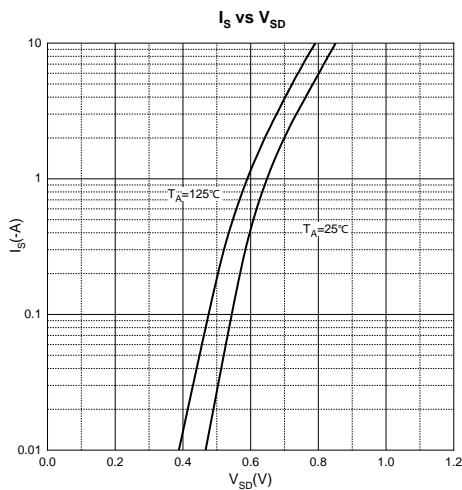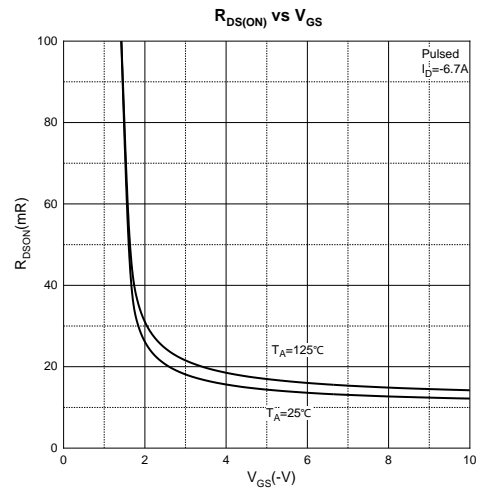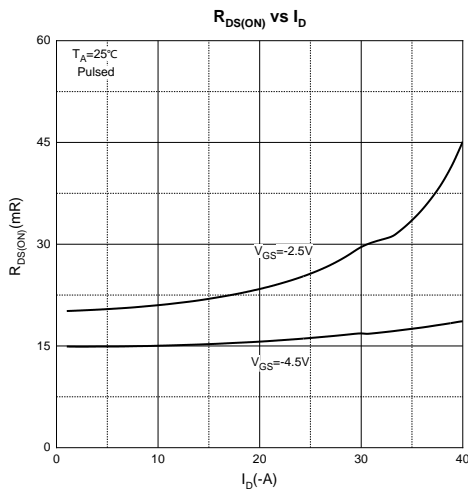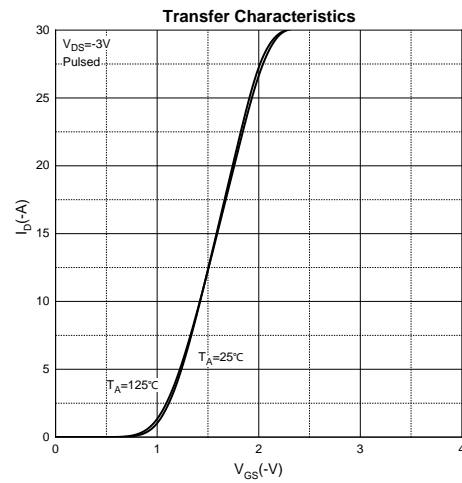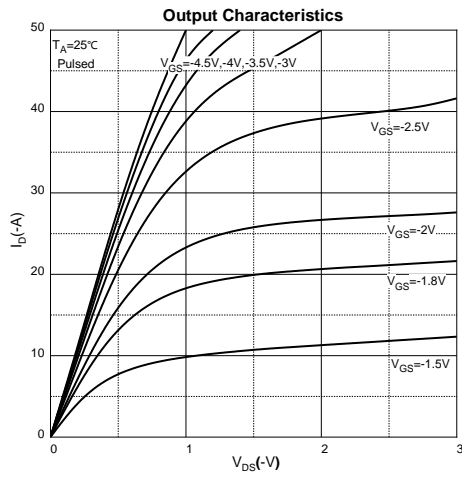


DFN2X2-6L Package Information

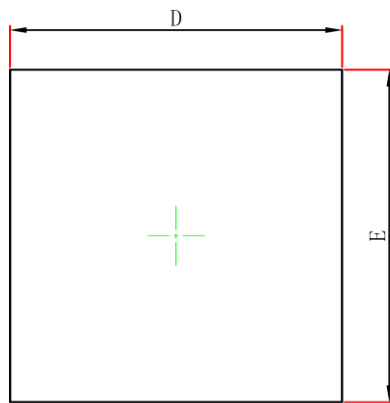

TOP VIEW

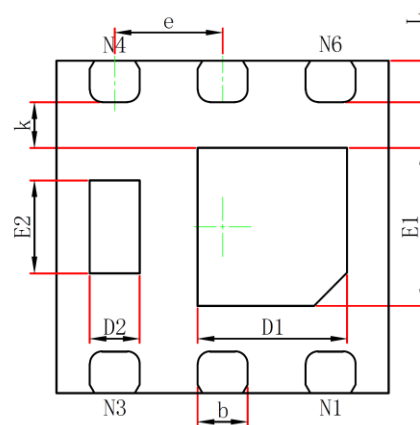

BOTTOM VIEW

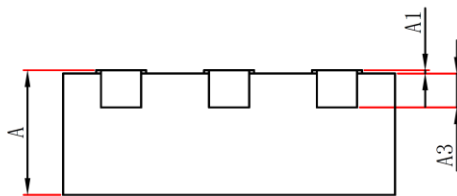

SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0	0.050	0	0.002
A3	2.03REF		0.008REF	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
k	0.200MIN		0.008MIN	
b	0.250	0.350	0.010	0.014
e	0.65BSC		0.026TYP	
L	0.174	0.326	0.007	0.013