



**GP**  
**ELECTRONICS**

**DTC143ZE**



Digital Transistor (NPN)

## DTC143ZE Digital Transistor


### Feature

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

### Schematic diagram

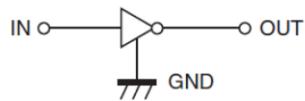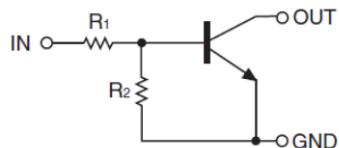

### Marking:

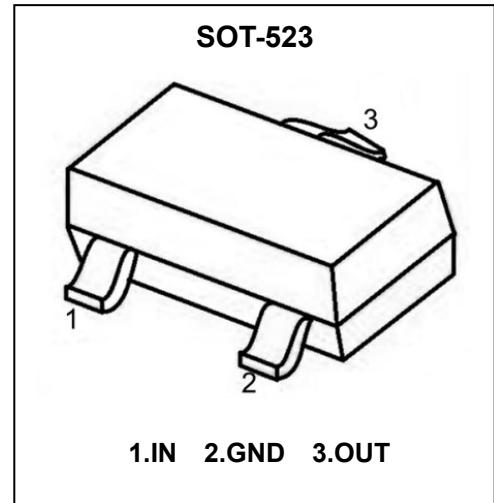

**ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)**


Parameter	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	50	V
Input Voltage	V <sub>IN</sub>	-5~+20	V
Output Current	I <sub>O</sub>	100	mA
Power Dissipation	P <sub>D</sub>	150	mW
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150	°C

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)**


Parameter	Symbol	Test Condition	Min	Type	Max	Unit	
Input voltage	V <sub>I(off)</sub>	V <sub>CC</sub> =5V , I <sub>O</sub> =100μA	0.5			V	
	V <sub>I(on)</sub>	V <sub>O</sub> =0.3V , I <sub>O</sub> =5mA			1.3	V	
Output voltage	V <sub>O(on)</sub>	I <sub>O</sub> /I <sub>I</sub> =10mA/0.5mA			0.1	0.3	V
Input current	I <sub>I</sub>	V <sub>I</sub> =5V			1.8	mA	
Output current	I <sub>O(off)</sub>	V <sub>CC</sub> =50V , V <sub>I</sub> =0V			0.5	μA	
DC current gain	G <sub>I</sub>	V <sub>O</sub> =5V , I <sub>O</sub> =10mA	80				
Input resistance	R <sub>I</sub>		3.29		6.11	kΩ	
Resistance ratio	R <sub>2</sub> / R <sub>I</sub>		8		12		
Transition frequency	f <sub>T</sub>	V <sub>O</sub> =10V,I <sub>O</sub> =5mA,f=1MHz			250	MHz	

## Typical Characteristics


**ON Characteristics**

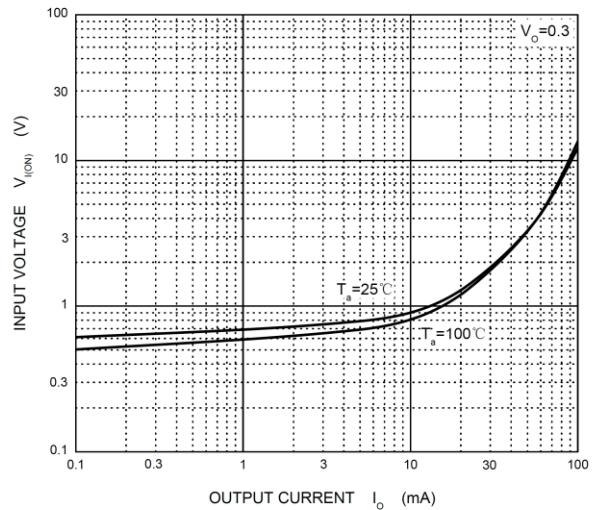


**OFF Characteristics**

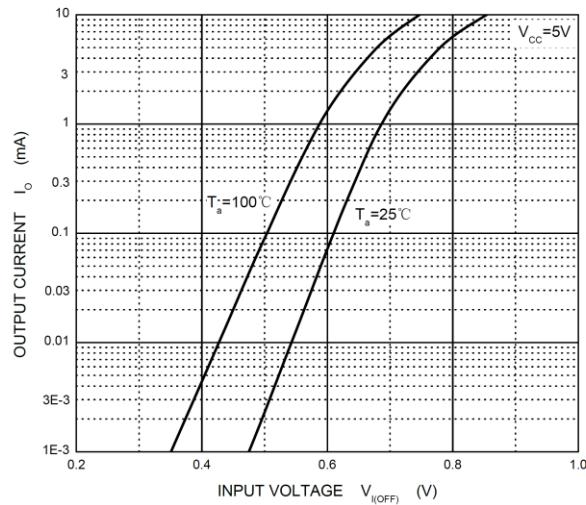


**G<sub>i</sub> — I<sub>o</sub>**

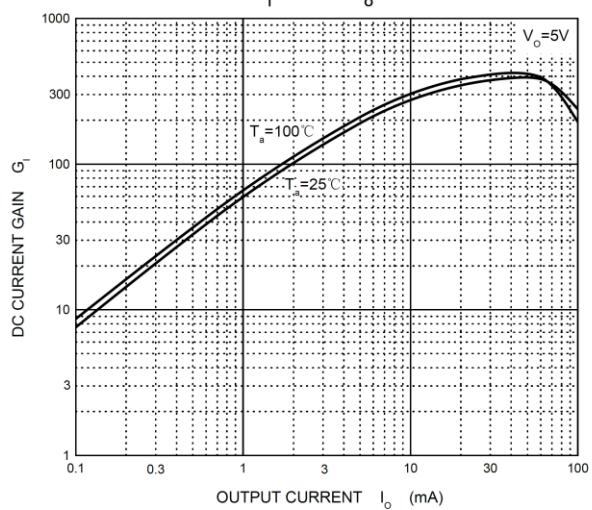


**V<sub>O(ON)</sub> — I<sub>o</sub>**

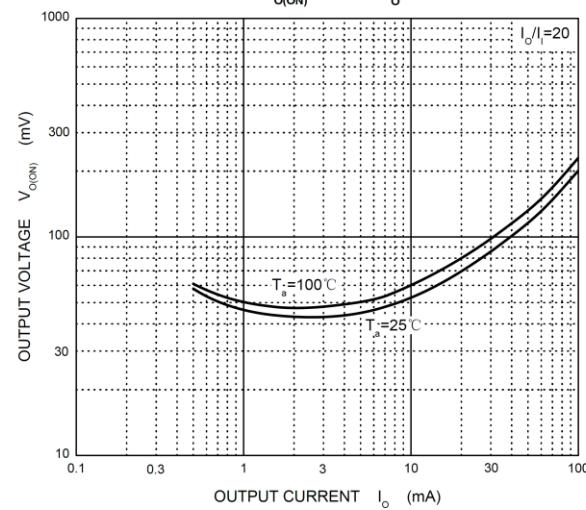


**C<sub>o</sub> — V<sub>R</sub>**

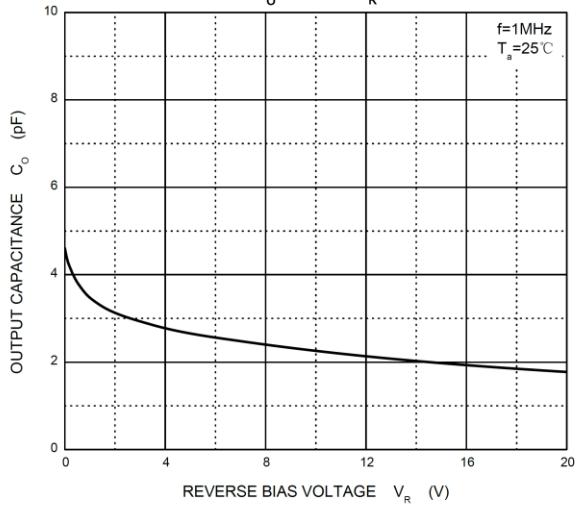

**P<sub>D</sub> — T<sub>a</sub>**

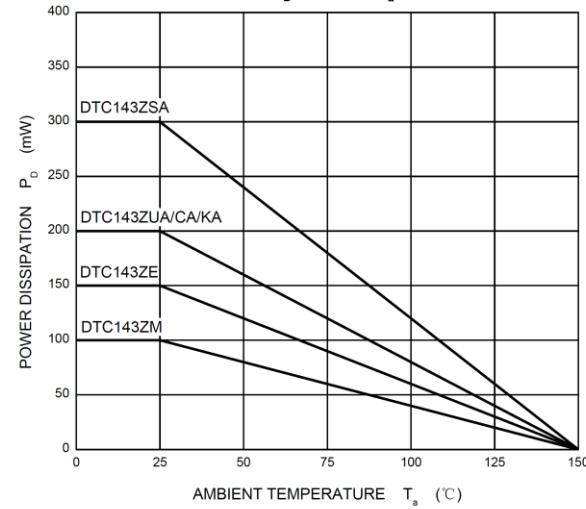

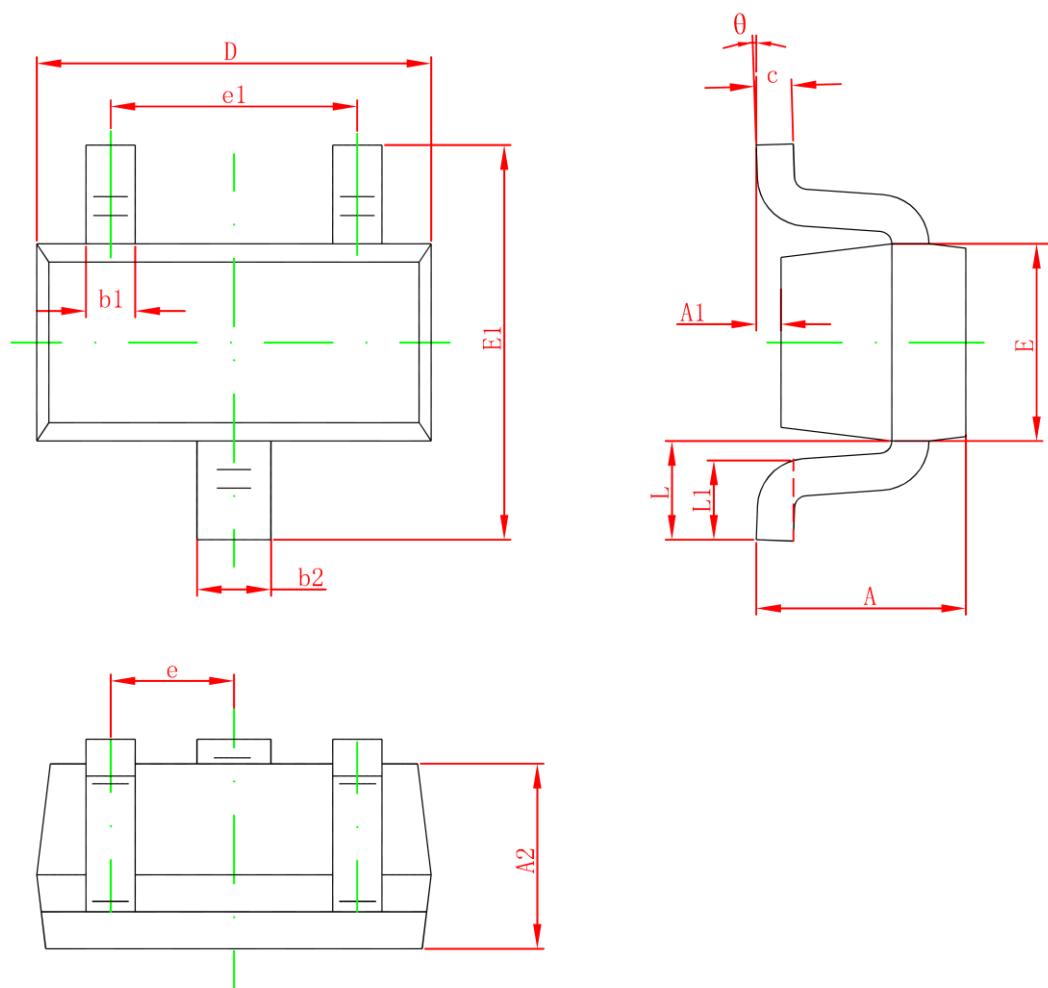**SOT-523 Package Information**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e1	0.900	1.100	0.035	0.043
e	0.500TYP		0.020TYP	
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°