



Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-50V	1.8Ω@-10V	-0.13A
	2.3Ω@-4.5V	

Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge
- ESD Protected


Application

- Load Switch
- DC/DC Converter


MARKING:



SOT-723



Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	-50	V
Gate - Source Voltage	V_{GS}	±20	V
Continuous Drain Current ^{1,5}	I_D	-0.13	A
Pulsed Drain Current ²	I_{DM}	-0.52	A
Power Dissipation ^{4,5}	P_D	200	mW
Thermal Resistance from Junction to Ambient ⁵	$R_{\theta JA}$	625	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~ +150	°C







MOSFET ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-50			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -50V, V_{GS} = 0V$			-1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 10	μA
On Characteristics³						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1	-1.6	-3	V
Drain-source On-resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -0.1A$		2.3	4.0	Ω
		$V_{GS} = -4.5V, I_D = -0.1A$		2.7	5.0	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = -25V, V_{GS} = 0V, f = 1MHz$		37		pF
Output Capacitance	C_{oss}			9.7		
Reverse Transfer Capacitance	C_{rss}			5.8		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$		159		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = -25V, V_{GS} = -10V, I_D = -1A$		2.1		nC
Gate-source Charge	Q_{gs}			0.4		
Gate-drain Charge	Q_{gd}			0.8		
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = -25V, V_{GS} = -10V, R_L = 50\Omega, R_G = 3\Omega$		11		ns
Turn-on Rise Time	t_r			6		
Turn-off Delay Time	$t_{d(off)}$			19		
Turn-off Fall Time	t_f			8		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_S = -0.13A$			-1.2	V


Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$.
- 5.Device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

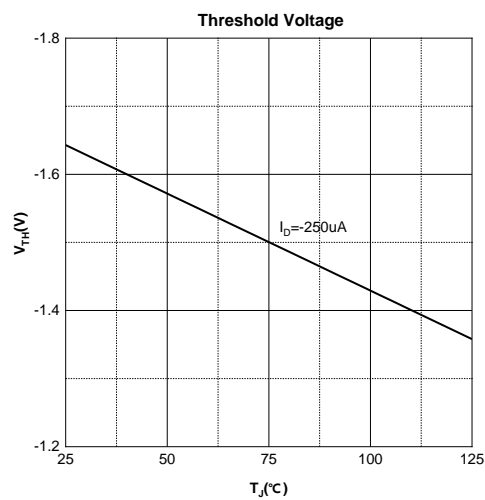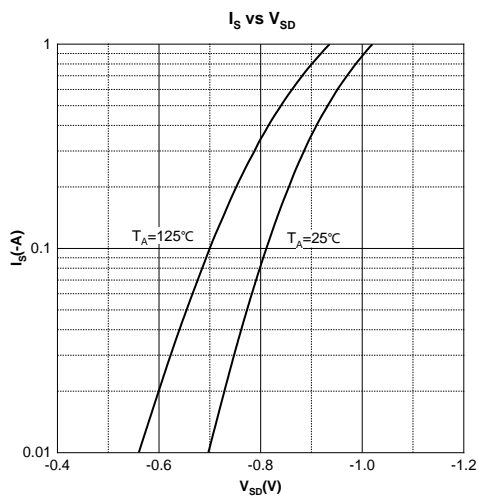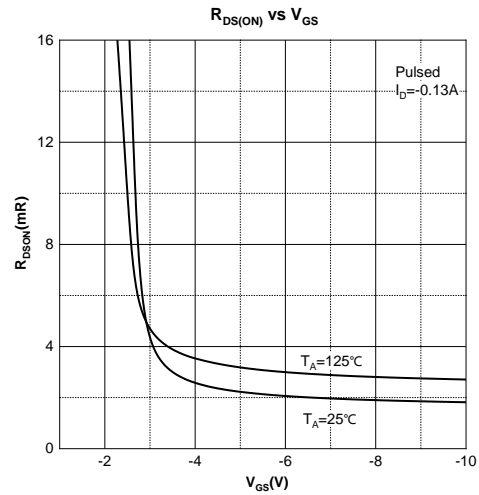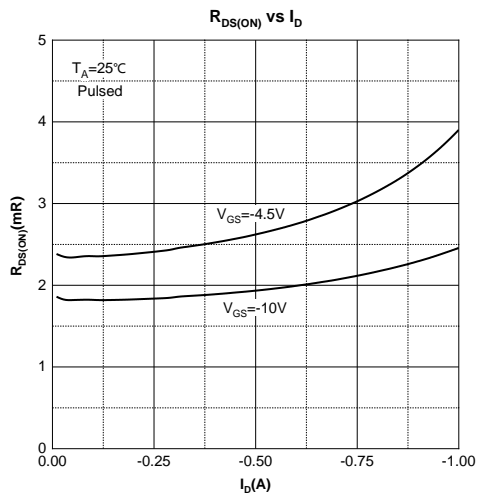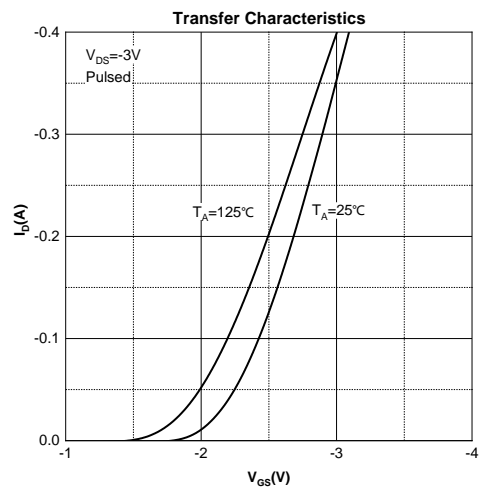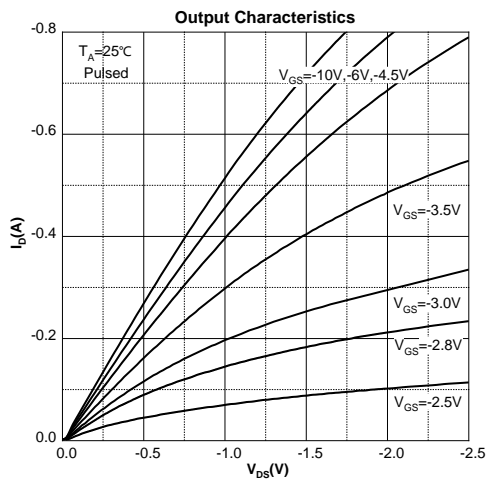

SOT-723 Package Information

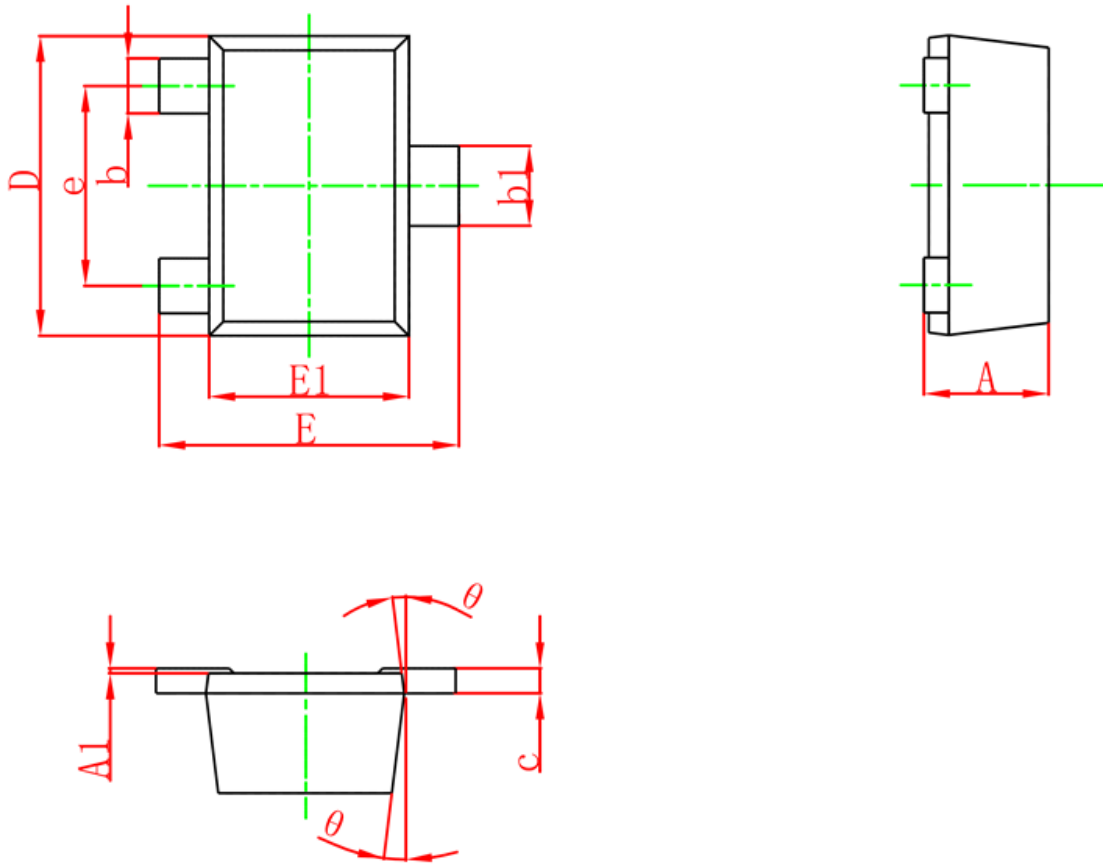

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.340	0.500	0.013	0.020
A1	0.000	0.050	0.000	0.002
b	0.150	0.270	0.006	0.011
b1	0.200	0.370	0.008	0.015
c	0.060	0.160	0.002	0.006
D	1.100	1.300	0.043	0.051
E	1.100	1.300	0.043	0.051
E1	0.700	0.900	0.028	0.035
e	0.8TYP		0.031TYP	
θ	8°REF		8°REF	