

## Introduction

The GPL6335 series are a group of positive voltage regulators manufactured by CMOS technologies with low power consumption and low dropout voltage, which provide large output currents even when the difference of the input-output voltage is small. The GPL6335 series can deliver 300mA output current and allow an input voltage as high as 18V. The series are very suitable for the battery-powered equipment, such as RF applications and other systems requiring a quiet voltage source.


## Features

- Low Quiescent Current: 2.5 $\mu$ A
- Operating Voltage Range: 2.5V~18V
- Output Current: 100mA
- Low Dropout Voltage: 100mV@1mA
- Output Voltage: 1.2~ 5.0V
- High Accuracy:  $\pm$ 2%
- Low Output Noise:  $27 \times V_{OUT} \mu V_{RMS}$  (10Hz~100kHz)
- Excellent Line and Load Transient Response
- Built-in Current Limiter, Short-Circuit Protection
- Over-Temperature Protection

## Applications

- Cordless Phones
- Radio control systems
- Laptop, Palmtops and PDAs
- Single-lens reflex DSC
- PC peripherals with memory
- Wireless Communication Equipment
- Portable Audio Video Equipment
- Car Navigation Systems
- LAN Cards
- Ultra-Low Power Microcontrollers

## Block Diagram

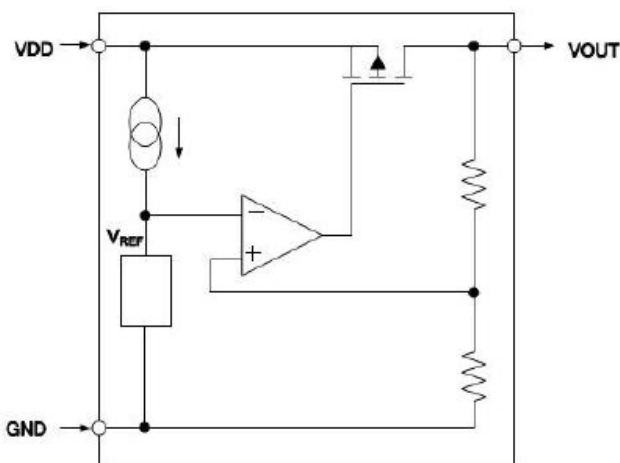


## Order Information

GPL6335①②③④


Designator	Symbol	Description
①②③	Integer	Output Voltage e.g. 1.8V=①:V, ②:1,③:8
④	K3	Package:SOT-23-3L
	KE	Package:SOT-89-3L

## Pin Configuration

SOT-23-3L



SOT-89-3L



### SOT-23-3L & SOT-89-3L

Pin Number		Pin Name	Function
SOT-23-3L	SOT-89-3L		
1	1	$V_{SS}$	Ground
2	3	$V_{OUT}$	Output
3	2	$V_{IN}$	Power input

## Absolute Maximum Ratings<sup>1)</sup> (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Units
Input Voltage <sup>2)</sup>	V <sub>IN</sub>	-0.3~20	V
Output Voltage <sup>2)</sup>	V <sub>OUT</sub>	-0.3~7	V
CE Pin Voltage	V <sub>CE</sub>	-0.3~V <sub>in</sub> +0.3	V
Output Current	I <sub>OUT</sub>	100	mA
Operating Junction Temperature Range <sup>3)</sup>	T <sub>j</sub>	-40~125	°C
Storage Temperature	T <sub>stg</sub>	-40~125	°C
Lead Temperature(Soldering, 10 sec)	T <sub>solder</sub>	260	°C
ESD rating <sup>4)</sup>	Human Body Model -(HBM)	4	kV
	Machine Model- (MM)	400	V

- 1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2) All voltages are with respect to network ground terminal.
- 3) This GPL6335 includes over temperature protection that is intended to protect the device during momentary overload. Junction temperature will exceed 125°C when over temperature protection is active. Continuous operation above the specified maximum operating junction temperature may impair device reliability.
- 4) ESD testing is performed according to the respective JESD22 JEDEC standard. The human body model is a 100 pF capacitor discharged through a 1.5kΩ resistor into each pin. The machine model is a 200pF capacitor discharged directly into each pin.

## Electrical Characteristics


GPL6335 Series ( $V_{IN}=V_{OUT}+1V$ ,  $C_{IN}=C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ. <sup>5)</sup>	Max.	Units
Input Voltage	$V_{IN}$				18	V
Output Voltage Range	$V_{OUT}$		1.2		5	V
DC Output Accuracy		$I_{OUT}=1mA$	-2		2	%
Dropout Voltage	$V_{dif}^{6)}$	$I_{OUT}=1mA$		100		mV
Supply Current	$I_{SS}$	$I_{OUT}=0A$		2.5	3.5	$\mu A$
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta V_{IN}}$	$I_{OUT}=10mA$ $V_{OUT}+1V \leq V_{IN} \leq 18V$		0.2		%/V
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=V_{OUT}+1V$ , $1mA \leq I_{OUT} \leq 70mA$		60	150	mV
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_A}$	$V_{IN}=V_{OUT}+2V$ $I_{OUT}=10mA$ , $0^\circ C < T_A < 70^\circ C$		0.75		mV/ $^\circ C$
Output Current Limit	$I_{LIM}$	$V_{IN}=V_{OUT}+1V$	100			mA
Short Current	$I_{SHORT}$	$V_{OUT}=V_{SS}$		25		mA
CE "High" Voltage	$V_{CE}^{H}$		1.5		$V_{IN}$	V
CE "Low" Voltage	$V_{CE}^{L}$				0.3	V
CE "High" Current	$I_{CE}^{H}$	$V_{CE}^{H}$			0.2	$\mu A$

5) Typical numbers are at  $25^\circ C$  and represent the most likely norm.


6)  $V_{dif}$ : The Difference Of Output Voltage And Input Voltage When Input Voltage Is Decreased Gradually Till Output Voltage Equals To 98% Of  $V_{OUT}$  (E).

## Typical Application Circuit

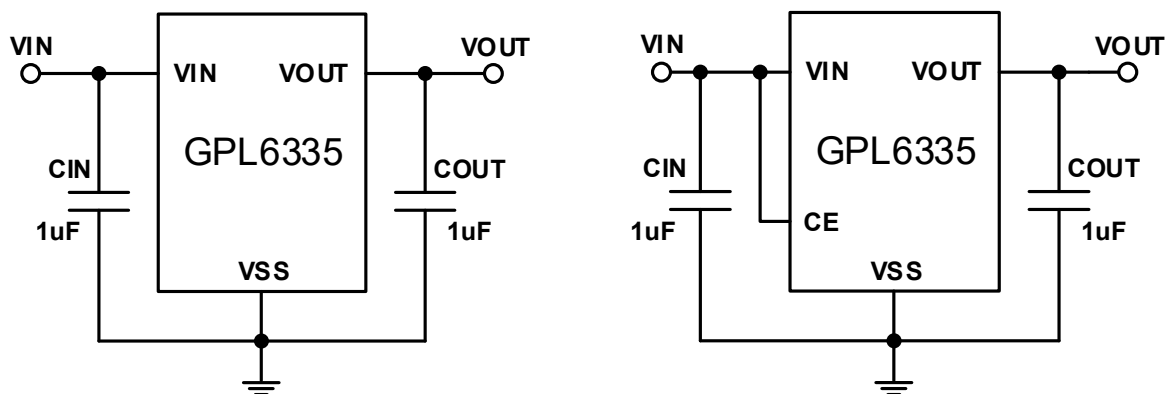


**Typical Performance Characteristics**


**Output Voltage vs. Temperature**

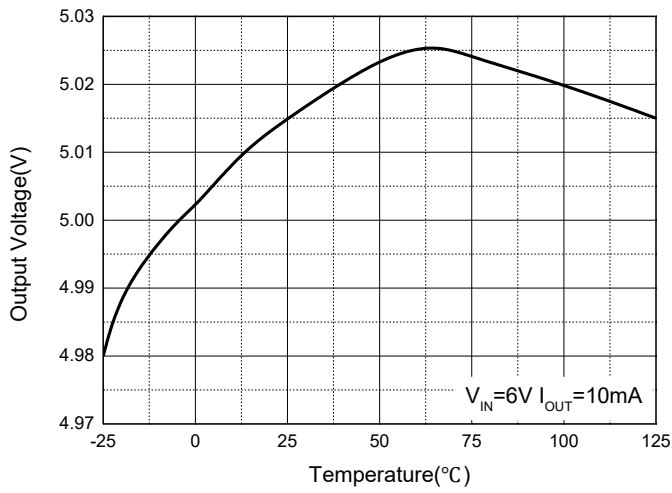


**Output Voltage vs. Output Current**

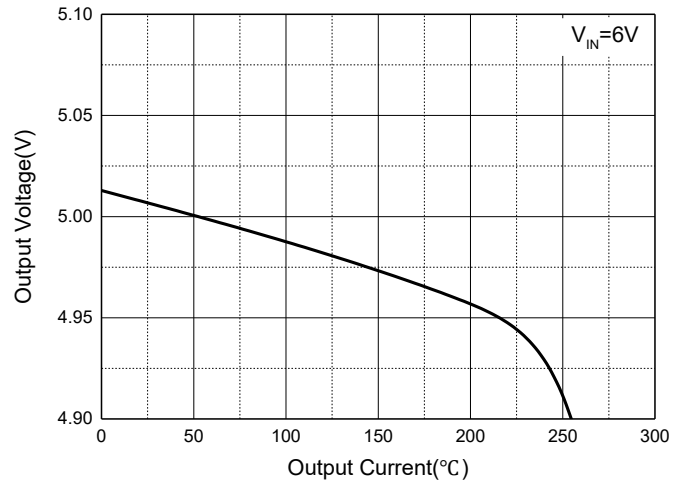


**Output Voltage vs. Input Voltage**

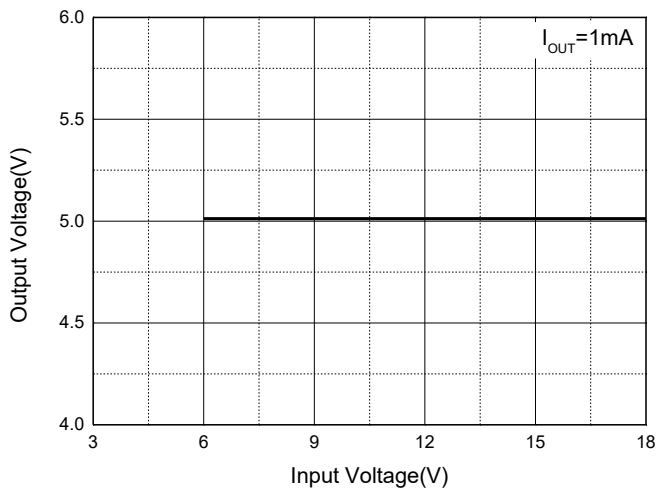

**Ground Current VS. Load Current**

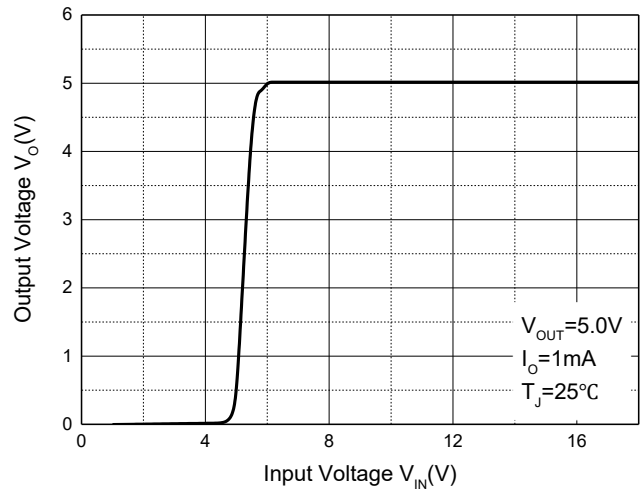


## SOT-23-3L Package Outline Dimensions

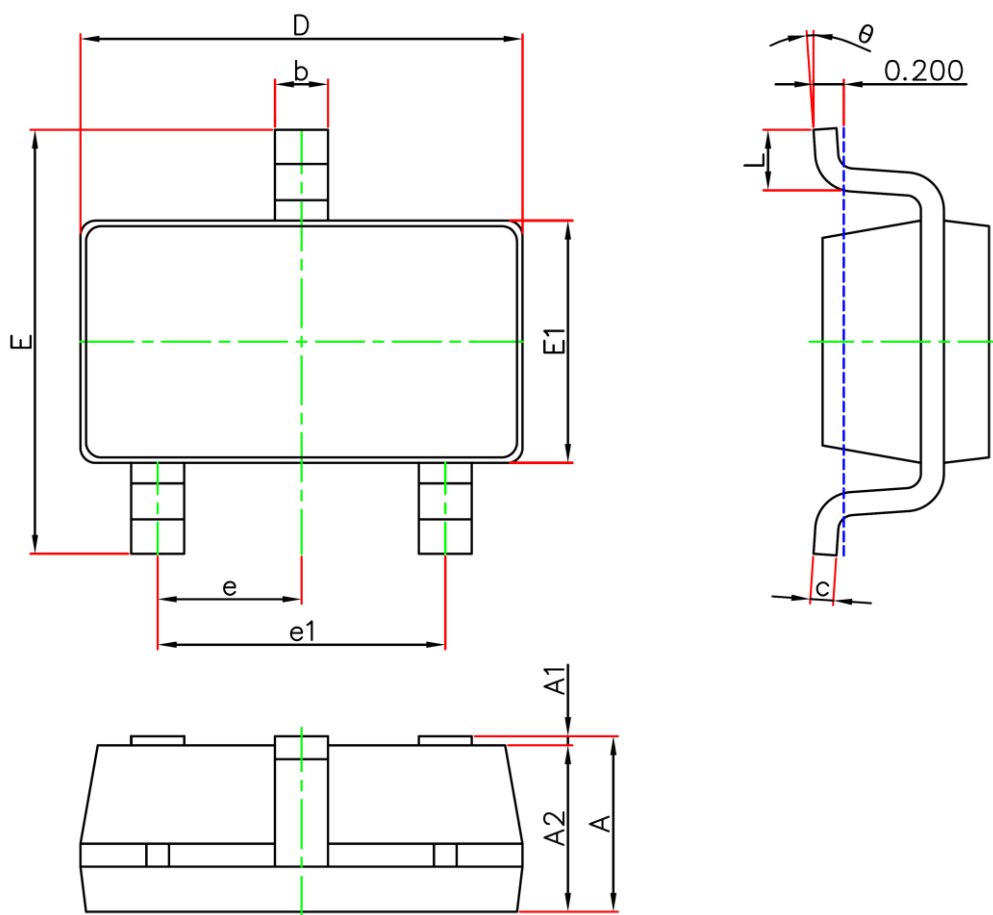

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0	0.150	0.000	0.006
A2	1.050	1.250	0.041	0.049
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	2.650	2.950	0.104	0.116
E1	1.500	1.700	0.059	0.067
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

## SOT-89-3L Package Outline Dimensions

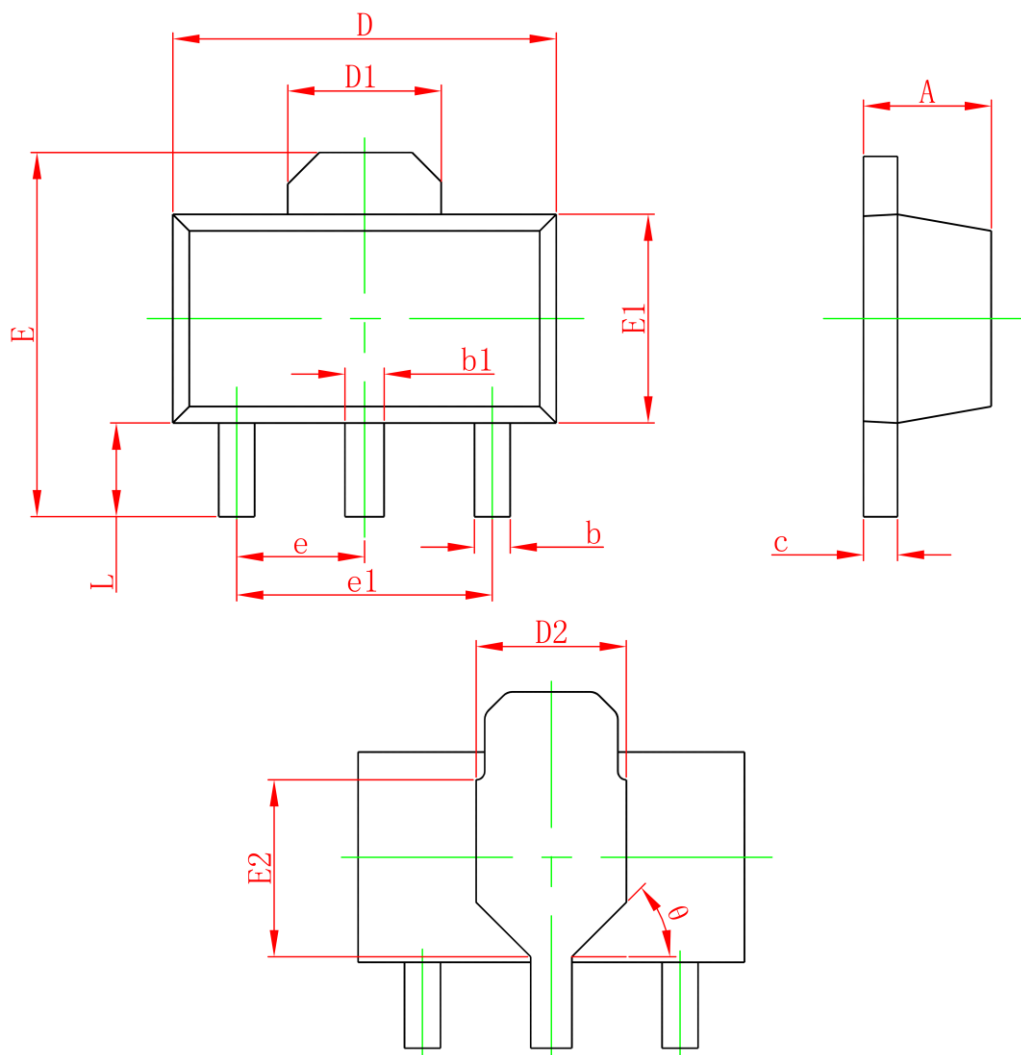

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.380	0.580	0.015	0.023
c	0.350	0.500	0.014	0.020
D	4.400	4.600	0.173	0.181
D1	1.650REF		0.065REF	
D2	1.650	1.850	0.065	0.073
E	3.900	4.400	0.154	0.173
E1	2.300	2.600	0.091	0.102
E2	1.900REF		0.075REF	
e	1.500TYP		0.059TYP	
e1	3.000TYP		0.118TYP	
L	0.900	1.200	0.035	0.047
$\theta$	45°		45°	