

Product Summary


$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	3m Ω @10V	83A

Feature

- Split Gate Trench Technology
- Low $R_{DS(ON)}$
- Low Gate Charge
- Low Gate Resistance
- 100% UIS Tested

Application

- DC/DC Converter
- Synchronous Rectification
- High-Frequency Switch

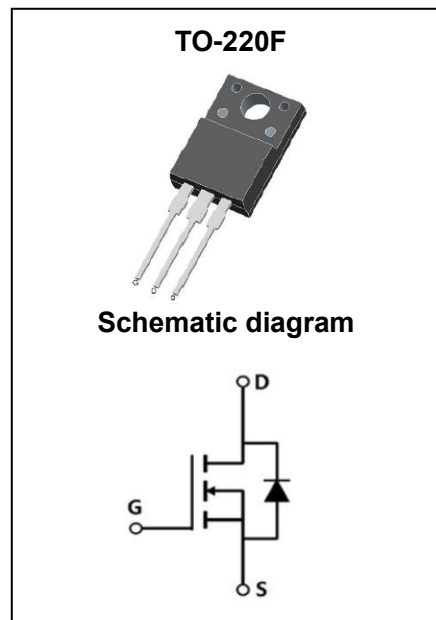

Package Marking and Ordering Information

Part Number	Package	Marking	Packing	Reel Size	Tape Width	Qty
GPT030N06LTC	TO-220F	T030N06L	Tube	NA	NA	50pcs

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ¹	I_D	$T_C = 25^\circ\text{C}$	83
		$T_C = 100^\circ\text{C}$	52
Pulsed Drain Current ²	I_{DM}	332	A
Single Pulsed Avalanche Current ³	I_{AS}	39	A
Single Pulsed Avalanche Energy ³	E_{AS}	760	mJ
Power Dissipation ⁵	P_D	38	W
Thermal Resistance from Junction to Ambient ⁶	$R_{\theta JA}$	60	$^\circ\text{C} / \text{W}$
Thermal Resistance from Junction to Case	$R_{\theta JC}$	3.3	$^\circ\text{C} / \text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)






Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 60V, V_{GS} = 0V$			1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics⁴						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.5	2.6	3.5	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 20A$		3.0	4.0	m Ω
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 30V, V_{GS} = 0V, f = 1MHz$		3789		pF
Output Capacitance	C_{oss}			1077		
Reverse Transfer Capacitance	C_{rss}			46		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$		2		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = 30V, V_{GS} = 10V, I_D = 10A$		50		nC
Gate-Source Charge	Q_{gs}			12		
Gate-Drain Charge	Q_{gd}			14		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 30V, V_{GS} = 10V, R_G = 3\Omega, R_L = 1.5\Omega$		20		ns
Turn-On Rise Time	t_r			6.5		
Turn-Off Delay Time	$t_{d(off)}$			62		
Turn-Off Fall Time	t_f			24		
Source-Drain Diode Characteristics						
Diode Forward Voltage ⁴	V_{SD}	$V_{GS} = 0V, I_S = 12A$			1.2	V

Notes :


1. The maximum current rating is limited by package. And device mounted on a large heatsink
2. Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
3. EAS condition: $V_{DD} = 30V, V_{GS} = 10V, L = 0.5mH, R_G = 25\Omega$ Starting $T_J = 25^\circ\text{C}$.
4. Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
5. The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$. And device mounted on a large heatsink
6. Device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

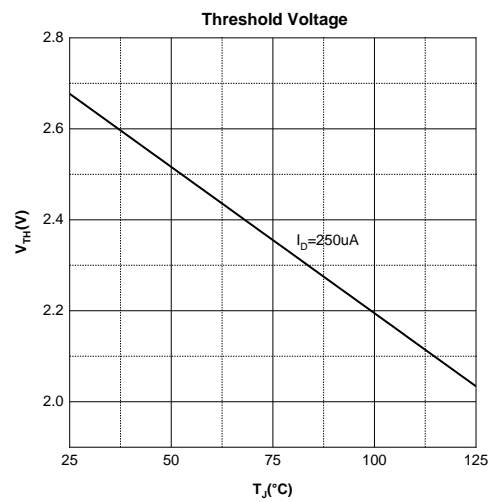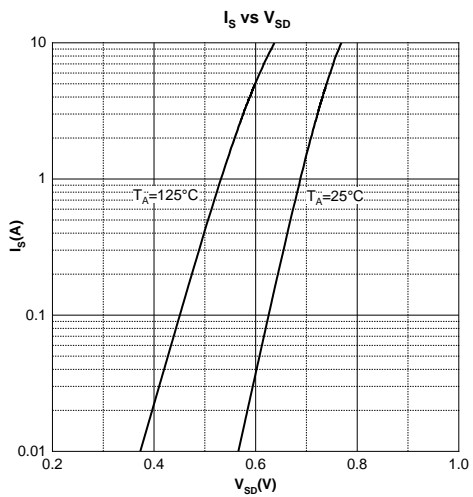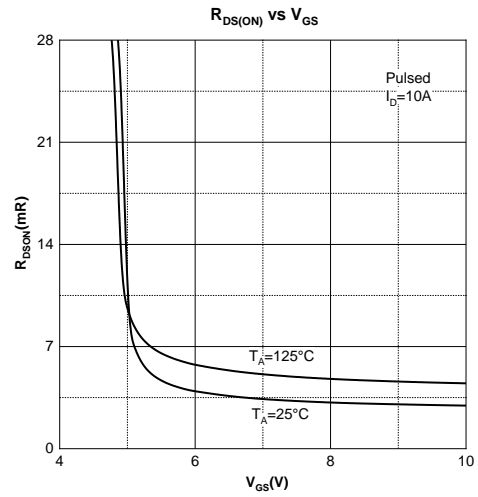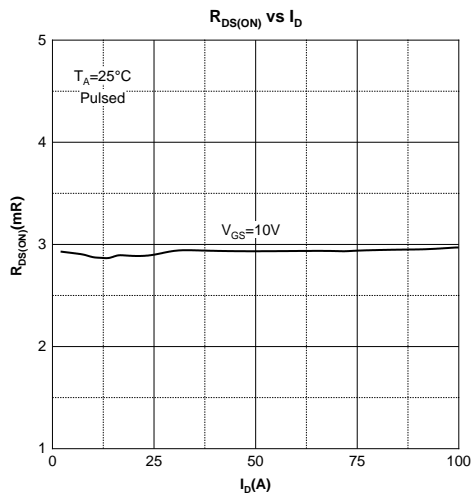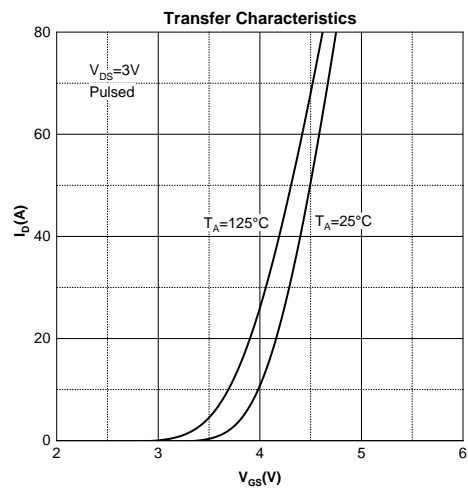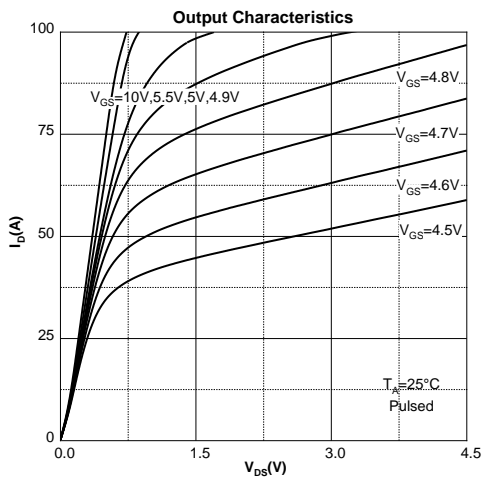


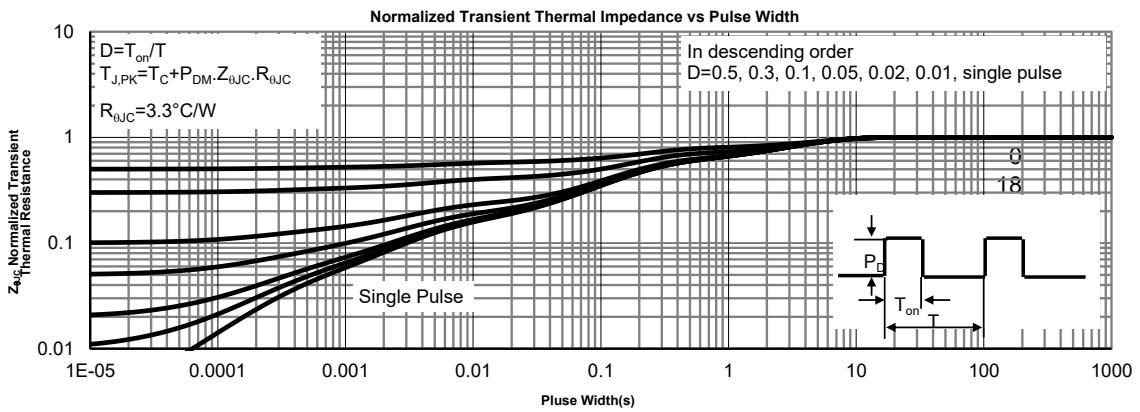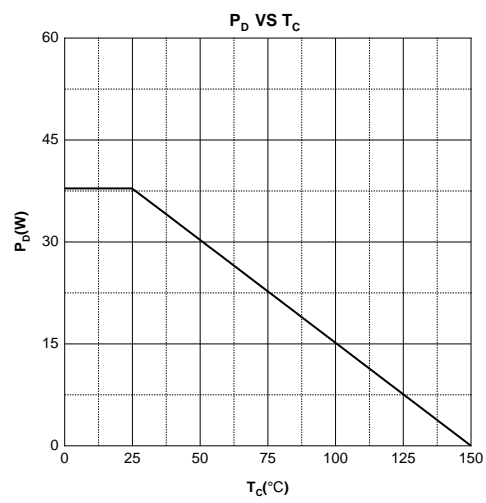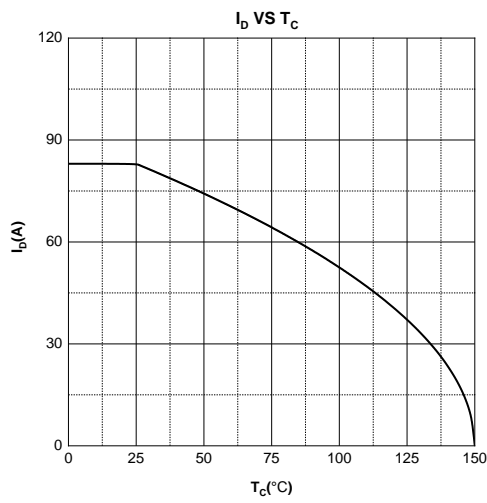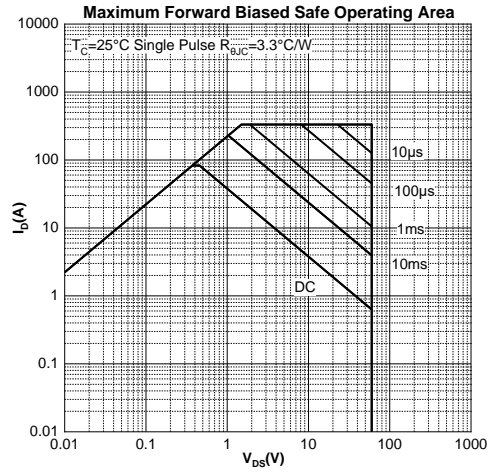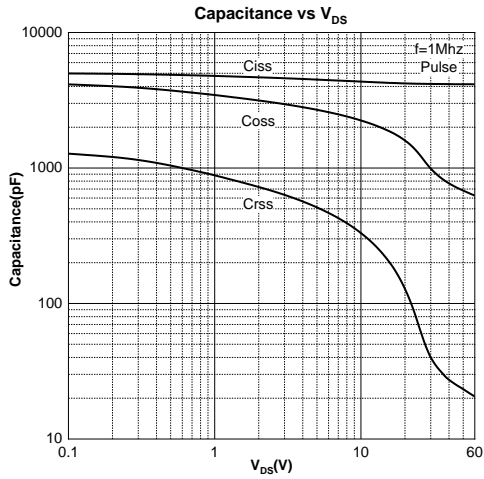


Gate Charge Test Circuit & Waveform

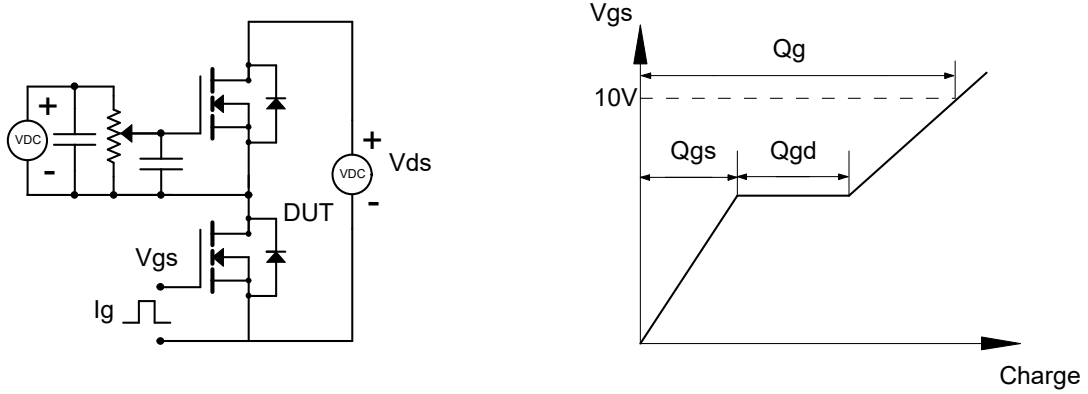


Resistive Switching Test Circuit & Waveform

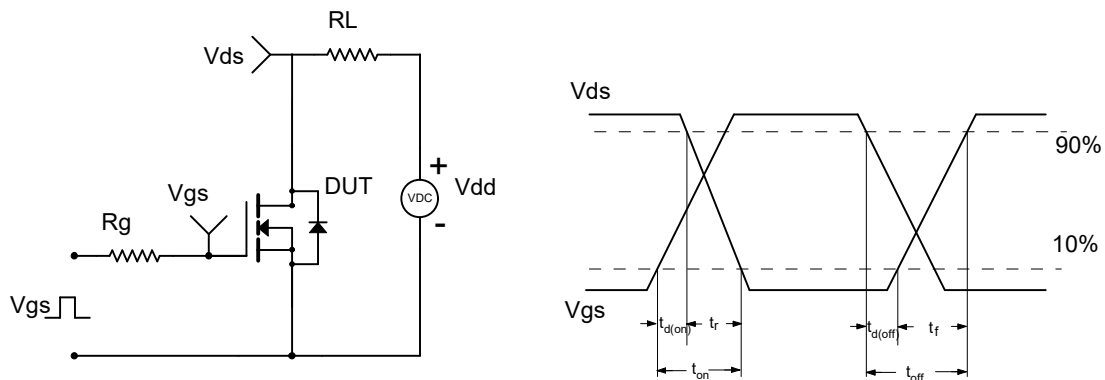

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

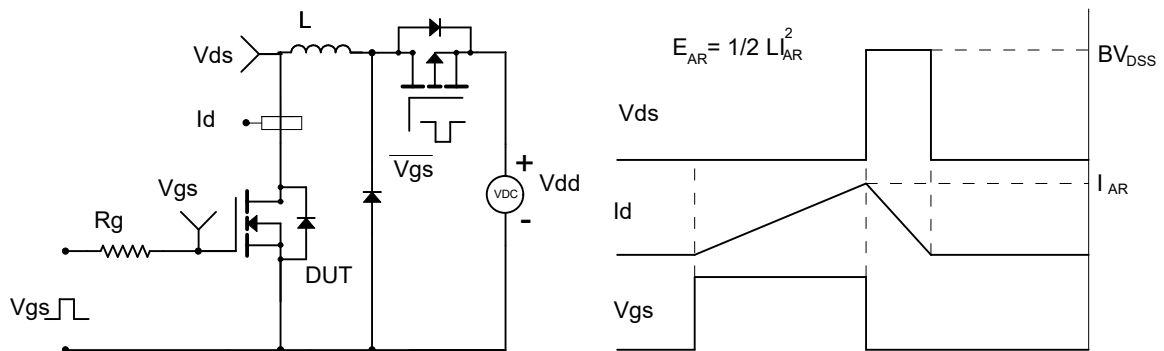

TO-220F Package Information

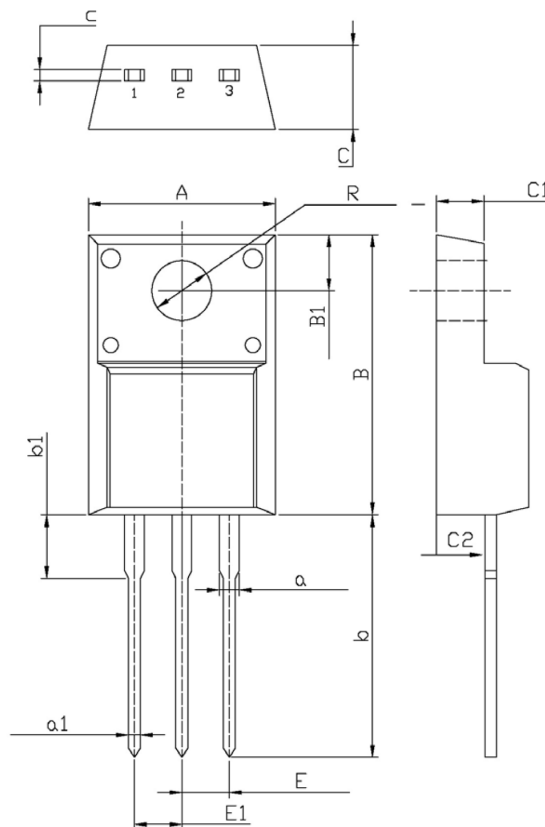

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
C	4.500	4.900	0.177	0.193
c	0.400	0.600	0.016	0.024
A	9.960	10.360	0.392	0.408
B	15.670	16.070	0.617	0.633
B1	3.300	3.500	0.130	0.138
R	3.080	3.280	0.121	0.129
b	12.480	13.480	0.491	0.531
b1	2.900	3.900	0.114	0.154
a	1.080	1.480	0.043	0.058
a1	0.700	0.900	0.028	0.035
E	2.340	2.740	0.092	0.108
E1	2.340	2.740	0.092	0.108
C1	2.340	2.740	0.092	0.108
C2	2.560	2.960	0.101	0.117

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.